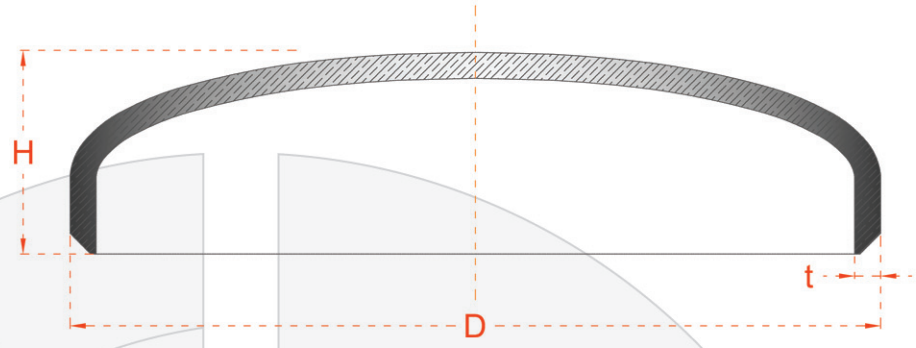


KEP

TS 2649 KT5
DIN 2617E.M.P.
www.emp.com.tr
www.empflans.com

CAP

TS 2649 KT5
DIN 2617

DN	DIŞ ÇAP DIAMETER D	ET KALINLIĞI WALL THICKNESS t			YÜKSEKLİK HEIGHT H	ORTALAMA AĞIRLIK APPROX WEIGHT		
		SCH 20	SCH 40	SCH 80		SCH 20	SCH 40	SCH 80
		15	21.3	2.0		2.9	3.6	32
20	26.9	2.3	2.9	4.0	32	0.04	0.05	0.07
	30			4.5		0.07	0.09	0.12
25	33.7			4.5		0.07	0.09	0.13
	38			4.8		0.10	0.14	0.16
32	42.4	2.6	3.6	4.8	38	0.11	0.15	0.18
	44.5			5.1		0.13	0.18	0.20
40	48.3			5.1		0.14	0.19	0.22
	57			5.6		0.25	0.31	0.44
50	60.3	2.9	4.0	5.6		0.26	0.32	0.45
	65			7.1		0.34	0.52	0.68
65	76.1			7.1		0.34	0.52	0.68
80	88.9	3.2	5.6	8.0	50	0.50	0.76	1.26
	101.6			8.8	60	0.94	1.32	1.87
	108	3.6	6.3	8.8	64	0.96	1.34	1.91
100	114.3			10.0	76	1.07	1.49	2.13
	133	4.0	7.1	10.0	76	1.40	2.25	3.10
125	139.7			11.0	90	1.55	2.50	3.45
	159	4.5	8.0	11.0	90	2.40	3.20	4.75
150	168.3			12.5	100	2.65	3.55	5.30
200	219.1	5.9	10.0	12.5	100	5.20	6.70	10.35
	267	6.3	11.0	12.5	127	7.75	9.70	13.55
250	273			12.5	127	8.10	10.10	14.15
300	323.9	7.1	11.0	12.5	152	11.75	16.15	17.80

Ölçüler mm olarak verilmiştir.
Çelik ve paslanmaz üretilebilir.

Dimensions are in mm.
Steel and stainless steel can be produce.

TS EN 10217 -1 ET KALINLIKLARINDAN MÜŞTERİ TERCİHİ KALINLIKLAR SEÇİLEBİLİR.