

DÖVME ÇELİK, SOKET DİRSEK 90° & 45°



3000 LB & 6000 LB
ANSI B 16.11





E.M.P.
www.emp.com.tr
www.empflans.com

FORGED SOCKET WELDING ELBOW 90° & 45°



3000 LB & 6000 LB
ANSI B 16.11

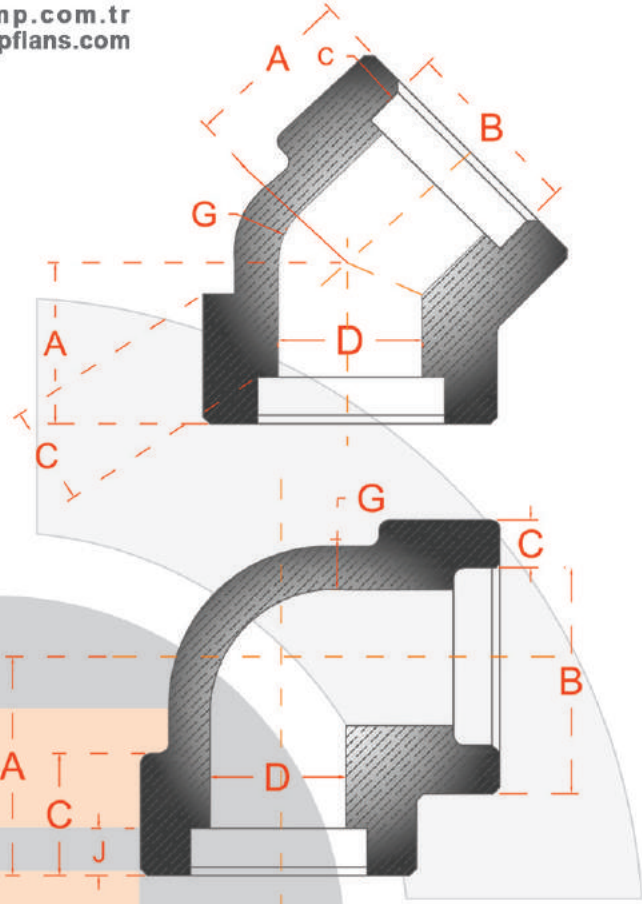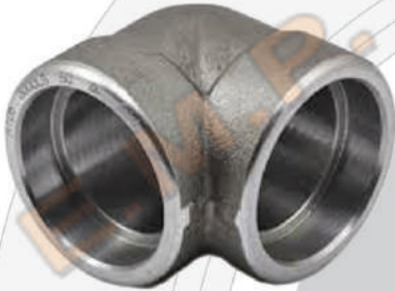

	A									
	90°				45°				Tolerances + -	
	3000 LB		6000 LB		3000 LB		6000 LB			
mm	inc	mm	inc	mm	inc	mm	inc	mm	inc	
1/4"	11.0	0.44	13.5	0.53	8.0	0.31	8.0	0.31	1.0	0.03
3/8"	13.5	0.53	15.5	0.62	7.5	0.31	11.5	0.44	1.5	0.06
1/2"	15.5	0.62	19.5	0.75	11.5	0.44	12.5	0.50	1.5	0.06
3/4"	19.5	0.75	22.5	0.88	12.5	0.50	14.5	0.56	1.5	0.06
1"	22.0	0.88	27.0	1.06	14.0	0.56	17.0	0.69	2.0	0.08
1 1/4"	27.0	1.06	32.0	1.25	17.0	0.69	21.0	0.81	2.0	0.08
1 1/2"	32.0	1.25	38.0	1.50	21.0	0.81	25.0	1.00	2.0	0.08
2"	38.0	1.50	41.0	1.62	25.0	1.00	29.0	1.12	2.0	0.08
2 1/2"	41.5	1.62			29.0	1.12			2.5	0.10
3"	57.5	2.25			31.5	1.25			2.5	0.10
4"	66.5	2.62			41.5	1.62			2.5	0.10

Ölçüler mm olarak verilmiştir.
Çelik ve paslanmaz üretilir.

Dimensions are in mm.
Steel and stainless steel can be produce

B - C - D - G VE J ÖLÇÜLERİNE SAYFA 149'A BAKINIZ.