

EŞİT & REDÜKSİYON TE (KAYNAKLI)



TS 2649 KT3
KAYNAKLI EN 10253 - 2
SCH 20 - SCH 40
DIN 2615




E.M.P.
www.emp.com.tr
www.empflans.com

EQUAL & REDUCING TEE (WELDED)



TS 2649 KT3
WELDED EN 10253 - 2
SCH 20 - SCH 40
DIN 2615

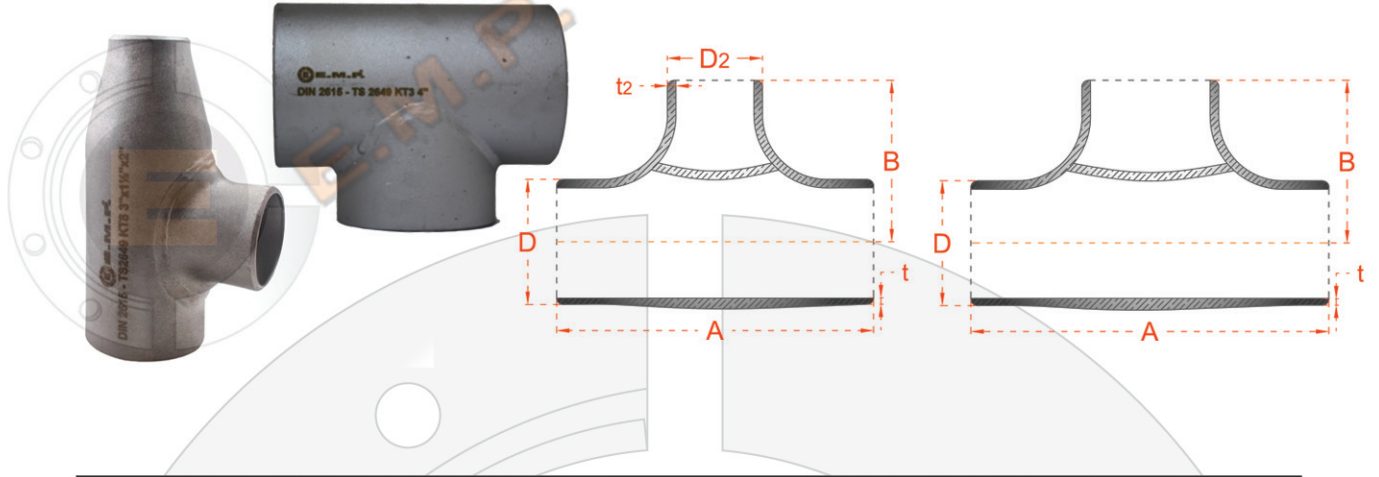

DN	DIŞ ÇAP DIAMETER		ET KALINLIĞI WALL THICKNESS			DIŞ ÇAP DIAMETER D2	ET KALINLIĞI WALL THICKNESS			A	B	ORTALAMA 6mm KG
	D	t	SCH 20	SCH 40	SCH 80		t2					
							SCH 20	SCH 40	SCH 80			
250	273.0	6.0	8.0	10.0	273	6.0	8	10	432	216	26.0	
					219.1	6.0	8			200	24.8	
					168.3	4.5	6			194	21.8	
					139.7	4.5	6			190	21.0	
300	323.9	6.0	8.0	10.0	323.9	6.0	8	10	508	254	37.1	
					273	6.0	8			240	35.2	
					219.1	6.0	8			230	33.0	
					168.3	4.5	6			220	29.5	
350	355.6	6.0	8.0	10.0	355.6	6.0	8	10	560	280	44.7	
					323.9	6.0	8			270	43.4	
					273.0	6.0	8			258	41.3	
					219.1	5.9	8			248	38.9	
400	406.4	6.0	8.0	10.0	406.4	6.0	8	10	610	305	56.0	
					355.6	6.0	8			305	53.6	
					323.9	6.0	8			300	52.2	
					273.0	6.0	8			283	49.8	
450	457.0	6.0	8.0	10.0	457.0	6.0	8	10	686	343	70.8	
					406.4	6.0	8			330	68.0	
					355.6	6.0	8			330	65.6	
					323.9	6.0	8			321	64.0	
500	508.0	6.0	8.0	10.0	508.0	6.0	8	10	762	308	61.3	
					457.0	6.0	8			299	58.0	
					406.4	6.0	8			381	87.0	
					355.6	6.0	8			369	84.5	
550	558.8	6.0	8.0	10.0	558.8	6.0	x	x	838	356	81.6	
					609.0	6.0	8			356	78.7	
					508.0	6.0	8			347	76.8	
					457.0	6.0	8			334	74.0	
600	609.0	6.0	8.0	10.0	609.0	6.0	8	10	864	324	70.9	
					508.0	6.0	8			432	119.0	
					457.0	6.0	8			432	112.0	
					406.4	6.0	8			420	109.0	
600	609.0	6.0	8.0	10.0	355.6	6.0	8	10	864	407	105.0	
					323.9	6.0	8			407	102.0	
					273.0	6.0	8			397	100.0	
					273.0	6.0	8			385	97.0	

Ölçüler mm olarak verilmiştir.
Çelik ve paslanmaz üretilebilir.

Dimensions are in mm.
Steel and stainless steel can be produce.

**TS EN 10217 - 1 ET KALINLIKLARINDAN İMALATÇI TERCİHİ KALINLIKLAR SEÇİLMİŞTİR.
(DN 250 DAHİL ÜSTÜ ÖLÇÜLERDE)**